
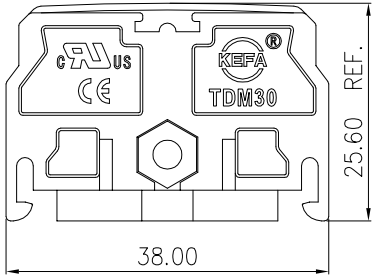


linear dimension(Tolerances Standard GB/T 14486-2008)								— ▯ ⊥		
variable range		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
	to	to 6	to 10	to 30	to 60	to 100	to 160	to	to 10	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

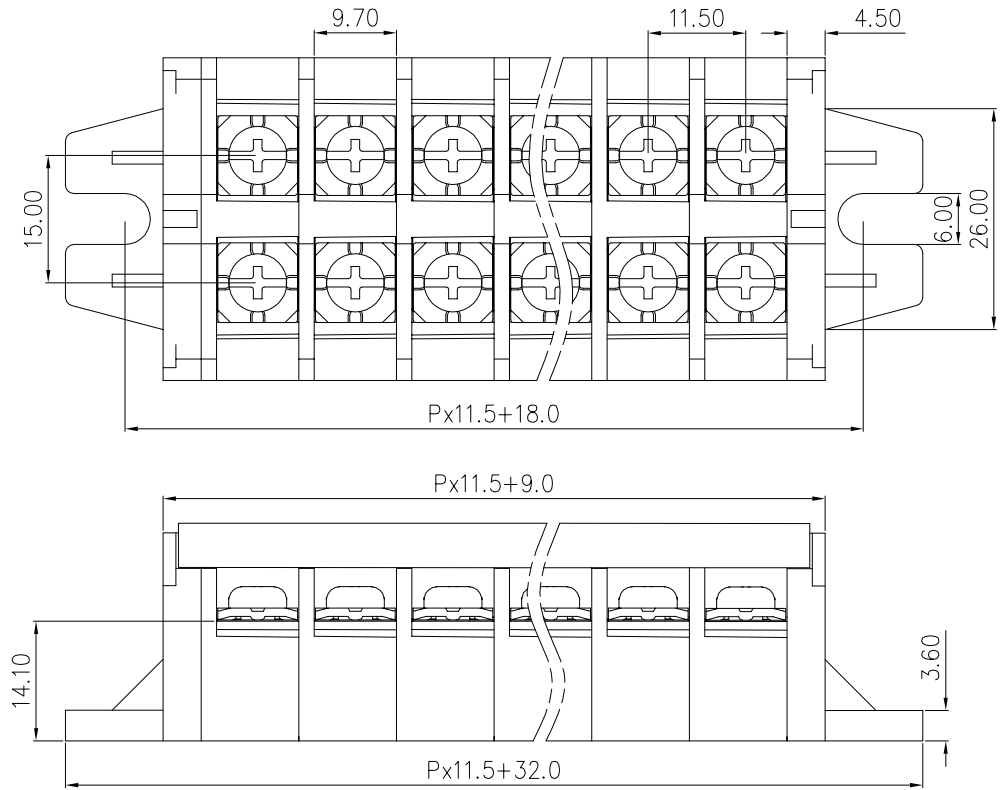

UL/CUL 技术参数 UL/CUL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	600	-	-
额定电流	Rated Current	[A]	30	-	-
接线范围	Wire Range		20-10		
单/多芯线	Solid/Stranded	[AWG]			
IEC 技术参数 IEC Technical Data					
额定电压	Rated Voltage	[V]	750		
额定电流	Rated Current	[A]	32		
耐电压	Withstanding Voltage		3000V/1Min		
导线截面积	Conductor cross section		4.0		
硬质/柔性导线	Solid/flexible	[mm <sup>2</sup> ]			
材料					
绝缘材料	Insulation Material		PC		
阻燃等级	Imflamability		UL94V-2		
导体材料	Contacting Material		铜合金 Copper alloy		
导体表面镀层	Contactive Coating		镀镍 Ni Plated		
一般参数					
间距	Pitch	[mm]	11.5		
极数	Poles	[P]	01-XX		
剥线长度	Stripping Length	[mm]	-		
螺丝/扭矩	Torque(Max)	[N.m]	M4/1.2		
工作温度	Operating temperatur	[°C]	-40~+125		
引针尺寸	Pin Dimensions	[mm]	-		
PCB板孔径	PCB Hole Diameter	[mm]	-		

DES.	LQQ	DATE	21.12.15	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	A
CHK.	BY	DATE	21.12.15	慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD				名称/TITLE	 TDM30-11.5			
APP.	CLF	DATE	21.12.15									