

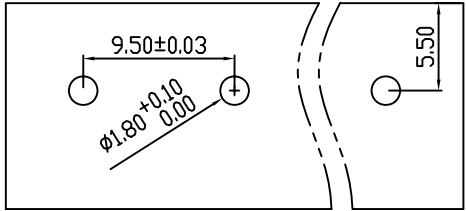
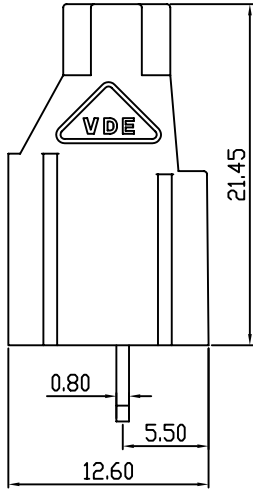
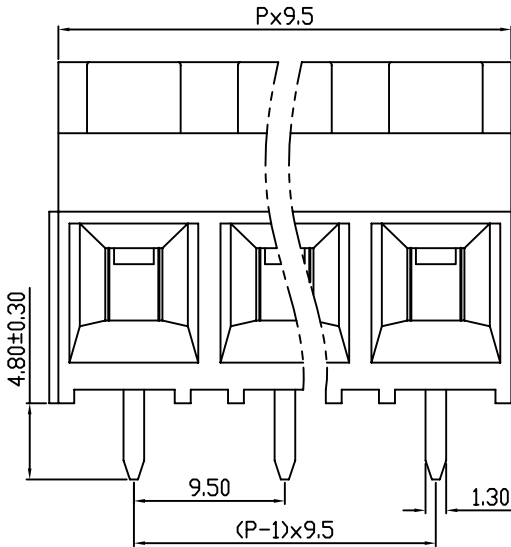


linear dimension(Tolerances Standard GB/T 14486-2008)								—   		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

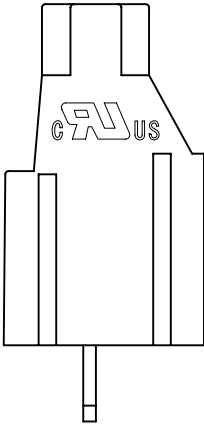

PCB LAYOUT

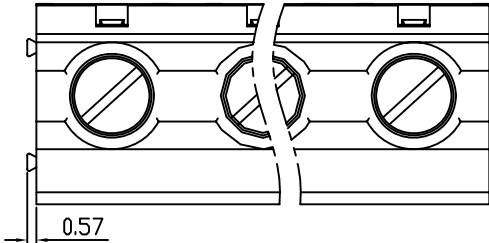

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03.13

UL/CUL 技术 参数		UL/CUL Technical Data					
等 级	Use Group		B	C	D		
额定电压	Rated Voltage	[V]	300	-	300		
额定电流	Rated Current	[A]	30	-	10		
接线范围	Wire Range		22-10				
单/多芯线	Solid/Stranded	[AWG]					
耐电压	Withstanding Voltage		3000V/1Min				
IEC 技术参数							
IEC Technical Data							
过电压类别	Overvoltage Category		III	III	II		
污染等级	Contamination Class		3	2	2		
额定电压	Rated Voltage	[V]	630	750	1000		
额定电流	Rated Current	[A]	32	32	32		
额定冲击电压	Impulse withstand voltagea	[KV]	6.0	6.0	6.0		
导线截面积	Conductor cross section		4.0				
硬质/柔性导线	Solid/ flexible	[mm²]					
材 料		Material					
绝缘材料	Insulation Material		PA66				
阻燃等级	Imflamability		UL94V-0				
导体材料	Contactur Material		铜合金 Copper alloy				
导体表面镀层	Contactive Coating		镀锡 Tin Plated				
一般参数			Other Data				
间距	Pitch	[mm]	9.5				
极数	Poles	[P]	2-24				
剥线长度	Stripping Length	[mm]	6-7				
螺丝	Screw/ 扭矩	Torque(Max)	M3.0/0.5				
工作温度	Operating temperatur	[°C]	-40~-105				
引针尺寸	Pin Dimensions	[mm]	4.8				
PCB板孔径	PCB Hole Diameter	[mm]	1.8				

DES.	LQQ	DATE	21.03.13	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
CHK.	SY	DATE	21.03.13	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD						名称 / TITLE	 KF950-9.5		
APP.	CLF	DATE	21.03.13										