RUNLUX | LED Linear Strip Fixture

LED Linear Strip Fixture





Overview

Runlux's Linear Strips Light Ideal choice for residential, commercial and industrial lighting. Steady performance and long lifetime

Features

- Voltage：120-277V/60Hz, **120-347V**/60Hz as optional;
- High Lumen Efficiency：Lumen output more than 130 lm/w, reduces energy consumption up to 80% compared to a fluorescent fixture.
- CCT： 3500, 4000 and 5000K

  3CCT: One fixture 3 color temp(3500K,4000K,5000K)
- Mounting method：Ceiling Mount or Cable Mount.
- Linkable (4FT to 8FT):need extra spare parts;
- Certified by DLC premium& ETL(cETL)
- Guarantee: 5 year warranty


Model Selection (Remark: Single Color(3500K/4000K/5000K is optional)

Model No.	Product Size	Rated Power	Lumen	CCT	Efficiency	Dimming	Picture
RG-2LS20WD3CCT	23.54"*2.62"*2.7"	20W	3250	**3500K 4000K 5000K in one fixture**	130	0-10V Dimmable	
RG-4LS25WD3CCT	47.24"*2.62"*2.7"	25W	3250				
RG-4LS32WD3CCT	47.24"*2.62"*2.7"	32W	4160				
RG-4LS35WD3CCT	47.24"*2.62"*2.7"	35W	4550				
RG-4LS40WD3CCT	47.24"*2.62"*2.7"	40W	5200				
RG-4LS46WD3CCT	47.24"*2.62"*2.7"	46W	5980				

***Now 120-347V is besting selling in Canada market!

Drawing

L (mm)	W (mm)	H (mm)	LF (mm)
598	66.5	68.5	332
1131	66.5	68.5	870

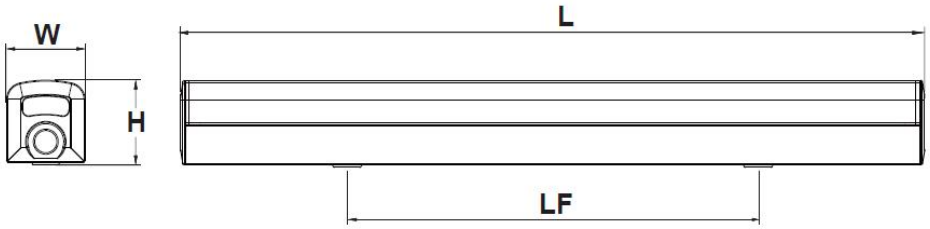

Phone:+86-21-68979033 | Fax:+86-21-58654108 | Web:www.runlux.net | Email:sales@runlux.net | Revised 2019/8/11

RUNLUX | LED Linear Strip Fixture

Specifications

Item	specification	Model			
		RG-2LS20WD3CCT	RG-4LS25WD3CCT	RG-4LS32WD3CCT	RG-4LS46WD3CCT
General Performance	Power Consumption	20W	25W	32W	46W
	Lumens Delivered	2600lm	3250lm	4160lm	5980lm
	Efficacy(lm/w)	130			
	CRI	80			
	Color Temperature	3500K/ 4000K /5000K			
	Lifetime(hours)	50,000			
	Color Consistency	Proprietary binning for uniform color			
	Power Factor	0.99			
	Input voltage	**120-277V standard (120-347V for option)**			
Physical	Housing	Plastic			
	Mounting	Ceiling Mount or Cable Mount			
	Humidity	20%-85% RH, non-condensing			
Certification	Certification	ETL, cETL, DLC premium, LM-79, LM-80(LED)			
	Material usage	RoHS compliant; no mercury			
	Work Temperature	-4°F to 122°F (-20°C to +50°C) operating temperature			
	Environment	Damp-listed			
	Warranty	5 years limited			

Motion Sensor







Built-in motion sensor
120-277V Only,
5m Height Max

External motion sensor
120-347V Only,
5m Height Max

Built-in motion sensor
12V Only (suit for 120-347V driver)
4m Height Max

Shipping information

Type	Pc/ inner	Pcs/ Carton	Carton Dimension (mm)	20GP	40GP	40HQ
2FT/20W	1pc	6pcs	635*255*185	5800pcs	11500pcs	14000pcs
4FT/25W,32W,35W,40W,46W	1pc	6pcs	1170*255*185	3150pcs	6200pcs	7200pcs